


Trim Brads

15 gauge Hardened Brads Performance

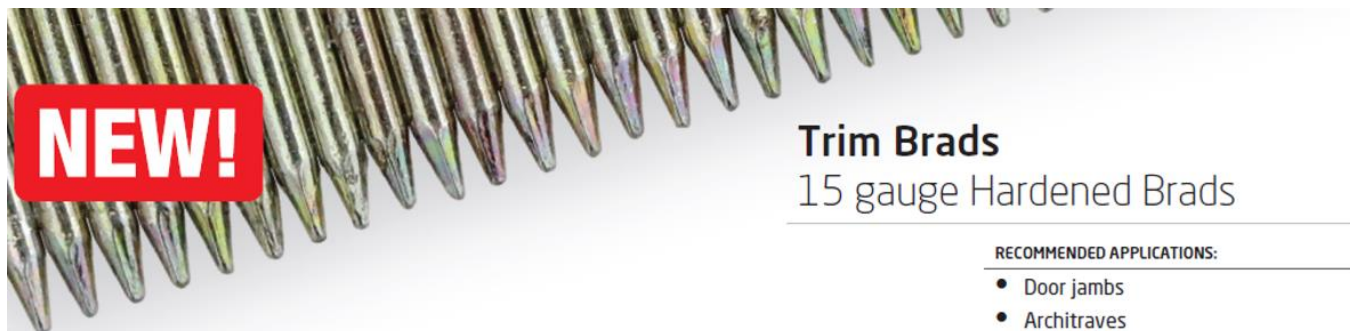

Trim Brads 15 gauge Hardened Brads

RECOMMENDED APPLICATIONS:

- Door jambs
- Architraves
- Skirting



Part No.	Description	Base Steel Thickness (mm)	Nail Length (mm)	Nail gauge	qty	qty
SNS075-100T	Trim Brad 25 x 15g	0.4 - 1.5	25	15g	3000	30,000
SNS075-150T	Trim Brad 38 x 15g	0.4 - 1.5	38	15g	1500	15,000
SNS1200 Finish	Trim Brad 50 x 15g	0.4 - 1.5	50	15g	1500	15,000

Note: 15 Gauge = 15 Pins per inch

Part No.	Description	Average Ultimate Pull out load capacity in kN			
		BMT 0.4mm G550 Steel	BMT 0.75mm G550 Steel	BMT 1.5mm G450 Steel	MGP10 grade Timber Embedment = 20mm
SNS075-100T	Trim Brad 25 x 15g	0.12 kN	0.25 kN	0.67 kN	0.70 kN
SNS075-150T	Trim Brad 38 x 15g				
SNS1200 Finish	Trim Brad 50 x 15g				

NOTE: The above loads are average ultimate loads obtained under laboratory conditions and appropriate safety factors should be applied to these values in order to determine either design or recommended load capacities.

Trim Bradder Timber Trim to Steel



NEW!



- Aerosmith™ Trim Brads
- 25-50mm brad range
- 60 brad load capacity
- 70-110 Psi operation
- Trigger safety lock
- Single fire
- 1.29kg

Part No.	Description	qty	qty
SNTST1850C4	Trim Bradder	1	n/a